


# ANTI WAVE POOL PRODUCTS

## "MAXIMUM" 6" LANE Specifications Sheet

### LANE SPECIFICATIONS:

Each lane comprises a number of discs (injection molded in durable polyethylene, with additives for maximum UV and chemical resistance) threaded onto a 2000# test strength 20-strand stainless steel cable. Interspersed between the discs, seated into the recesses provided, are ovoid blow-molded floats. One end of the cable is secured by means of copper sleeves to form a loop holding a stainless steel eyelet, into which is fitted a stainless steel S-hook. The opposing end of the lane is fitted with the unique Supertensioner™, a turnbuckle tensioning device.

The body, lock nut and cap of the Supertensioner™ are injection molded of a specially compounded polypropylene while the other components are stainless steel (internal threaded rod, hook, lock nut bushing) and naval bronze (molded body bushing). The cable is restrained by a stainless steel clamp assembly, which locates inside the cap. The lane is supplied fully assembled; there may need to be some slight adjustment of the Supertensioner™ location, for which a full set of instructions is included.

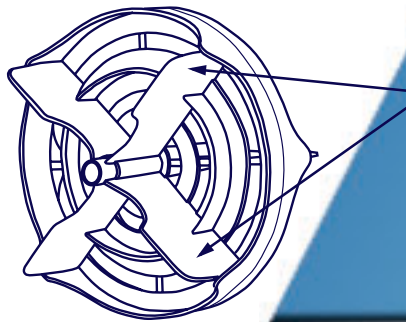

Four fins on both sides of the disc extend fully to engage with adjacent fins, thereby creating a solid wave-retention barrier. No water gets through!

### STANDARD COLORS ARE:



**Discs:** Red, Blue, White, Green, Yellow, Black, Orange, Teal, Light Gray, Purple.

**Floats:** Red, Blue, White, Green and Yellow.

**Supertensioner™:** Red, Blue, White, Green, Yellow and Black.




The undulating shape of the outer rim causes the wave to be deflected downward, thus leaving no wake on either side.

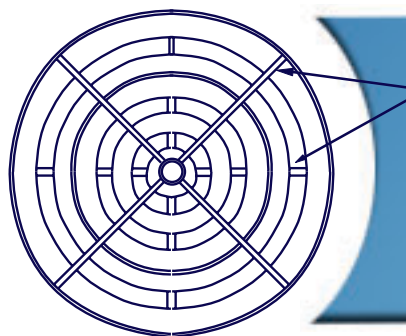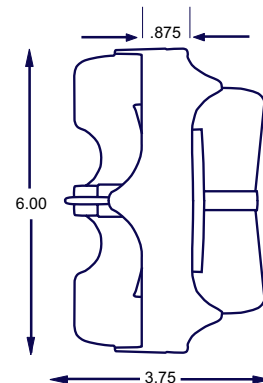

Internal ribs and walls are designed to optimize the impact-reducing capabilities of the disc, while keeping weight to the requisite level.

### "MAXIMUM" 6-INCH LANE STRINGING PATTERNS

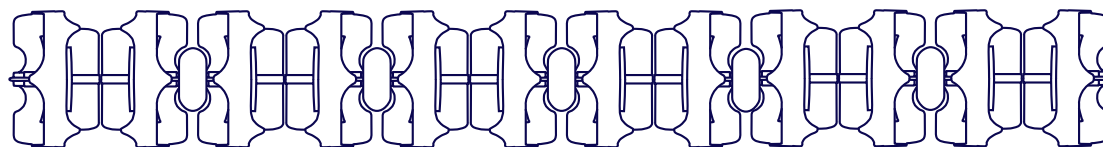

- 60 ft lane:** STR (1 x 47) + (9 x 10) + (1 x 47) - Hook  
15 foot solid color lead-ins are followed by alternating colored sections.
- 75 ft lane:** STR (1 x 46) + (2 x 10) + (11 x 9) + (2 x 10) + (1 x 47) + Hook  
15 foot solid color lead-ins are followed by alternating colored sections.  
15 meter backstroke markers are available upon request.
- 25 m lane:** (1 x 46) + (4 x 10) + (9 x 9) + (4 x 10) + (1 x 47) + Hook  
5 meter solid color lead-ins are followed by alternating colored sections.  
15 meter backstroke markers are available upon request.
- 50 m lane:** (1 x 46) + (17 x 10) + (9 x 9) + (17 x 10) + (1 x 47) + Hook  
5 meter solid color lead-ins are followed by alternating colored sections.  
15 meter backstroke markers are available upon request.

All AntiWave products are supported by a 3-year warranty



**ANTI WAVE** POOL PRODUCTS "Simply the Best"

1144 Northwest 53<sup>rd</sup> Street, Seattle, WA 98107

Tel: 206.676.8209 Fax: 206.784.9708 www.antiwave.com

